


WLS LIGHTING SYSTEMS


CM2 GARAGE LIGHTING SERIES



ENGINEERING DIMENSIONS

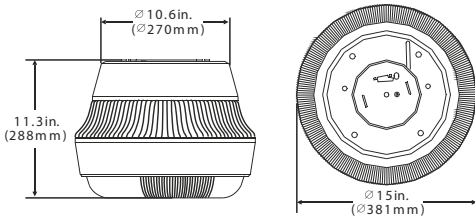

MOUNTING PLATE

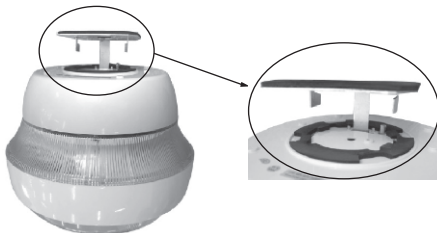

PACKING INFORMATION

WEIGHTS	CUBIC FEET	MASTER CARTON QTY
16.67LBS	2.0'	1PC



listed for wet locations

APPLICATIONS

Parking areas, entrances, walkways, underpasses, parking garages, loading docks, recreation areas, and on the side of buildings.

SPECIFICATIONS

- UL listed for wet locations
- Heavy duty die-cast aluminum housing
- One piece anodized aluminum designed reflector for best light efficiency
- For covered ceiling mount only
- Use min 90°C supply conductors

ORDERING INFORMATION

SELECT APPROPRIATE CHOICE FROM EACH COLUMN TO FORMULATE ORDER CODE. Refer to example below.

SERIES	LAMP WATT	LIGHT SOURCE*	LINE VOLTAGE ¹	LUMINAIRE FINISH
CM2	70W	V - Mercury Vapor	120V	BRZ - Bronze
	100W		208V	BLK - Black
	150W	HPS - High Pressure Sodium PSMH - Pulse Start Metal Halide	240V	PLT - Platinum Plus
	175W		277V	BUF - Buff
			480V	WHT - White
		MT - Multi Tap ²	GRN - Green	
				CC - Custom Color

CM2 175 MH MT BRZ

(EXAMPLE ORDER)

ORDER :

WLS-CM2 _____

FOOTNOTE:

1. Consult factory for international voltages.
2. MT - Multi Tap is shipped standard unless otherwise specified. (Multi Tap consists of 120V, 208V, 240V, and 277V. Multi Tap is pre-wired for highest voltage. Alternate voltages will require field re-wiring.)

* In accordance with the 2007 Energy Independence and Security Act (EISA), fixtures will no longer be available in Probe Start Metal Halide with wattages from 150 watts through 500 watts for new installations. Replacement parts for existing fixtures are still available.

Approved By: _____ Project Name: _____

Location: _____ Date: _____

P.O. Box 100519 | Fort Worth, TX 76185 | 800.633.8711 | Fax: 817.735.4824 | www.wslighting.com

WLS LIGHTING SYSTEMS

Consider the Impact!