




### DIMENSIONS

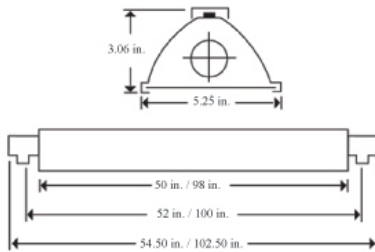

### SPECIFICATIONS

**HOUSING** - Sealed aluminum extrusion with white interior and cast aluminum end plates.

**LENS** - Diffuser/ lens is a smooth clear acrylic.

**LIGHT SOURCE** - Available in T5, T5HO, T8, and T12HO lamps. Available in 28 and 58 watts. T5 and T5HO available in 46" with 1 or 2 lamps. T8 available in 48" with 1 lamp. T12HO available in 48" or 96" with 1 lamp.

**WIRING** - Integral junction box on one end of fixture permits wiring connection within closure. Fixtures may be coupled for continuous runs without additional accessories.

**LISTING** - Fixture and Ballast: UL Listed.  
Ballast: Thermally protected, class P, HPF, Non PCB.



### ORDERING INFORMATION SELECT APPROPRIATE CHOICE FROM EACH COLUMN TO FORMULATE ORDER CODE. Refer to example below.

SERIES	LAMP COUNT	LAMP TYPE	BALLAST & VOLTAGE
OSL	1 2	T5 T5HO	E120V - Electronic, 120V E277V - Electronic, 277V MV - Electronic, Multivolt
	1	T8 T12HO	

**OSL      1      T5      MV**

(EXAMPLE ORDER)

**ORDER :**  
**WLS-OSL** \_\_\_\_\_

Approved By: \_\_\_\_\_ Project Name: \_\_\_\_\_

Location: \_\_\_\_\_ Date: \_\_\_\_\_

P.O. Box 100519 | Fort Worth, TX 76185 | www.wslighting.com