


# WLS LIGHTING SYSTEMS


# CMI GARAGE LIGHTING SERIES



## ENGINEERING DIMENSIONS

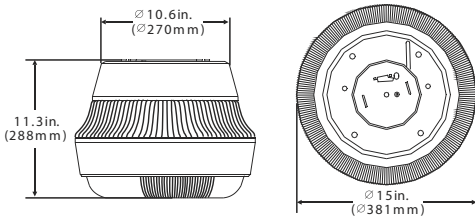

## MOUNTING PLATE

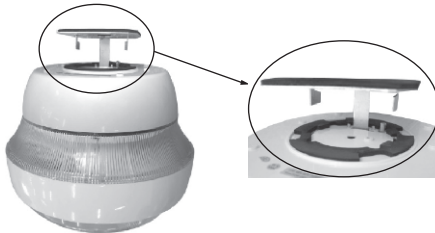

## PACKING INFORMATION

WEIGHTS	CUBIC FEET	MASTER CARTON QTY
16.67LBS	2.0'	1PC



## APPLICATIONS

Parking areas, entrances, walkways, underpasses, parking garages, loading docks, recreation areas, and on the side of buildings.

## SPECIFICATIONS

- UL listed for wet locations
- Heavy duty die-cast aluminum housing
- One piece anodized aluminum designed reflector for best light efficiency
- 15" diameter diffuser with clear dome lens, approximately 85% light to driving area and 15% uplight, IES Type V is standard.
- High temperature, Non-aging gray silicone gasket under diffuser and EPDM gasket for rear wire entrance hole.
- For covered ceiling mount only
- Use min 90 C supply conductors

## ORDERING INFORMATION

SELECT APPROPRIATE CHOICE FROM EACH COLUMN TO FORMULATE ORDER CODE. Refer to example below.

SERIES	LAMP WATTAGE	LIGHT SOURCE	LINE VOLTAGE <sup>1</sup>	LUMINAIRE FINISH
CMI	85	IND - Induction	MT - Multi Tap	WHT - White

**CMI 85 IND MT WHT**

(EXAMPLE ORDER)

**ORDER :**

**WLS-CMI** \_\_\_\_\_

Approved By: \_\_\_\_\_ Project Name: \_\_\_\_\_

Location: \_\_\_\_\_ Date: \_\_\_\_\_

P.O. Box 100519 | Fort Worth, TX 76185 | 800.633.8711 | Fax: 817.735.4824 | www.wslighting.com

**WLS LIGHTING SYSTEMS**

Consider the Impact!