



WLS LIGHTING SYSTEMS

FLAT GLASS LENS SL SERIES



DIMENSIONS

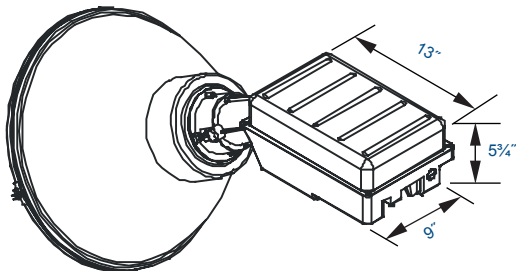

Handle Yoke
Includes "No Tools Needed" Aiming Adjustment



Pole Top Mount
Includes Hardware

 CSA Certified
listed for wet locations

SPECIFICATIONS

HOUSING - Die cast aluminum lamp housing and ballast box, stamped aluminum cover, gasket, textured architectural bronze finish over a chromate conversion coating.

REFLECTOR - Aluminum reflectors: Standard, Type II, Type III, Type IV/V, Type VI.

LENS - Clear flat tempered glass lens.

SOCKET - Porcelain 5KV pulse rated mogul base socket with nickel plated screw shell.

LIGHT SOURCES - Pulse Start Metal Halide, Natural White, Metal Halide or High Pressure Sodium. Clear lamp is supplied as standard.

BALLASTS - High-power factor type CWA ballasts are rated for -20° F operation.

WATTAGE - High Pressure Sodium: 400 to 1000W
Metal Halide: 1000 to 1500W
Pulse Start Metal Halide: 400 to 875W
Natural White: 575 to 775W

MOUNTING - Pole top mount or Yoke with "No Tools Needed" adjustment handle.

FINISH - Bronze polyester powder coat standard. Custom Colors available on request.

LISTING AND RATING - CSA: listed for wet locations.

Approved By: _____ Project Name: _____

Location: _____ Date: _____

1919 Windsor Place ■ Fort Worth, TX 76110 ■ 800.633.8711 ■ Fax: 817.735.4824 ■ www.wslighting.com

 **WLS** LIGHTING SYSTEMS

Consider the Impact!

SL SERIES

FLAT GLASS LENS

ORDERING INFORMATION SELECT APPROPRIATE CHOICE FROM EACH COLUMN TO FORMULATE ORDER CODE. Refer to example below.

SERIES	DISTRIBUTION	LAMP WATTAGE	LIGHT SOURCE*	LENS	LINE VOLTAGE	LUMINAIRE FINISH	OPTIONS
SL SLU ¹	ST - Standard 2 - Type II 3 - Type III 5 - Type IV/V 6 - Type VI	400W 750W 875W	PSMH - Pulse Start Metal Halide	FG - Flat Glass Lens	MT - Multi Tap	BRZ - Bronze CC - Custom Color	PTM - Pole Top Mount SF - Single Fusing DF - Double Fusing GS - Glare Shield LL - Less Lamp NO - No Options
		575W 775W	NW - Natural White				
		1000W 1500W	MH - Metal Halide				
		400W 750W 1000W	HPS - High Pressure Sodium				

SL ST 1000 MH FG MT BRZ NO

(EXAMPLE ORDER)

**ORDER:
WLS-SL**

FOOTNOTES:

1 - SLU series for uplighting applications as a floodlight.

* In accordance with the 2007 Energy Independence and Security Act (EISA), fixtures will no longer be available in Probe Start Metal Halide with wattages from 150 watts through 500 watts for new installations. Replacement parts for existing fixtures are still available.

Approved By: _____ Project Name: _____

Location: _____ Date: _____

1919 Windsor Place ■ Fort Worth, TX 76110 ■ 800.633.8711 ■ Fax: 817.735.4824 ■ www.wslighting.com

WLS LIGHTING SYSTEMS

Consider the Impact!