


WLS LIGHTING SYSTEMS

SWI 12" SQUARE INDUCTION SERIES



DIMENSIONS

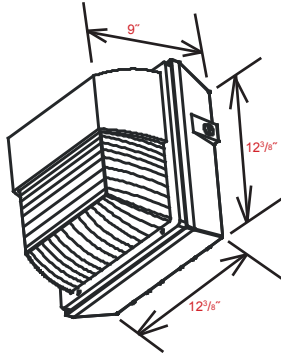

SPECIFICATIONS

HOUSING - Die-cast aluminum housing and front frame with hood. 1/2" coin plugs with o-ring for conduit and photocells. Textured architectural powder coat finish over a chromate conversion coating.

REFLECTOR - Aluminum reflector.

LENS - Polycarbonate prismatic lens.

MOUNTING - Mount over a 4" recessed outlet box, or use 1/2" surface conduit.

WATTAGE - Induction: 40W, 5000K.

FINISH - Available colors are bronze, black, white, gray and graphite. Custom colors are available upon request (consult factory).

LISTINGS & RATINGS - CSA: Listed for wet locations.

ORDERING INFORMATION SELECT APPROPRIATE CHOICE FROM EACH COLUMN TO FORMULATE ORDER CODE. Refer to example below.

SERIES	DISTRIBUTION	LAMP WATTAGE	LIGHT SOURCE	LINE VOLTAGE	LUMINAIRE FINISH	ACCESSORIES
SWI	AR - Aluminum Reflector	40W	IND - Induction	120V 277V	BRZ - Bronze BLK - Black WHT - White GRY - Grey GPT - Graphite CC - Custom Color	NO - No Option

SWI AR 40 IND 120 BRZ NO

(EXAMPLE ORDER)

ORDER :

WLS-SWI _____

Approved By: _____ Project Name: _____

Location: _____ Date: _____

P.O. Box 100519 | Fort Worth, TX 76185 | www.wslighting.com

WLS LIGHTING SYSTEMS
Consider the Impact!