
## WLS LIGHTING SYSTEMS

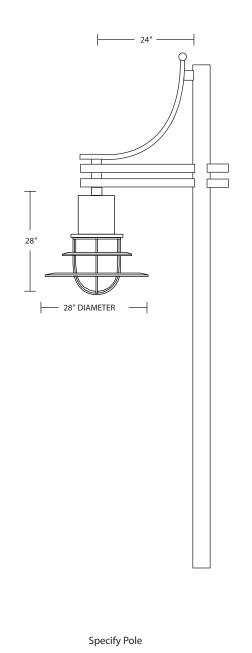

## 477 SERIES

## **SPECIFICATIONS**

**LENS** - Clear acrylic dome.

**HOUSING** - Heavy gauge spun aluminum.

**REFRACTOR** - Clear prismatic glass.

**SOCKET -** Mogul base.

**BALLAST** - High power factor.

**ARM** - 1.5" square aluminum tube.

**GUARD** - .375" diameter aluminum bars.

FINISH - Baked enamel.

## **ORDERING INFORMATION** SELECT APPROPRIATE CHOICE FROM EACH COLUMN TO FORMULATE ORDER CODE. Refer to example below. LINE VOLTAGE LUMINAIRE LAMP LIGHT WATT. SOURCE\* FINISH **SERIES** 477 70W MH - Metal Halide 120V **BRZ** - Bronze 100W PSMH - Pulse Start 208V **BLK** - Black 240V 150W Metal Halide PLT - Platinum 175W **HPS** - High Pressure 277V BUF - Buff 480V WHT - White 250W Sodium GRN - Green **V** - Mercury Vapor MT - Multi CC - Custom Color Tap 175 **PSMH** MT **BRZ** 477 (EXAMPLE ORDER) ORDER: **WLS-477**

WLS LIGHTING SYSTEMS

Consider the Impact!

<sup>\*</sup> In accordance with the 2007 Energy Independence and Security Act (EISA), fixtures will no longer be available in Probe Start Metal Halide with wattages from 150 watts through 500 watts for new installations. Replacement parts for existing fixtures are still available.