

DSA SERIES DECORATIVE

SPECIFICATIONS

FINISH - Available in either Architectural Textured or High Gloss finish.

LAMP OPTIONS - Designed to accommodate Incandescent, Compact Fluorescent, and High Intensity Discharge lamps. CFL and HID lamps available – order separately; Incandescent lamps by other.


MOUNTING - Cast Aluminum hub tapped for 3/4" NPT conduit. Available factory prewired with 96" leads or white or black cord set and canopies. Cord sets listed for damp locations only.

REFLECTOR - Heavy-duty, spun galvanized steel construction.

SOCKETS - Incandescent (rated 660 Watt/600 Volt) and HID fixtures (4KV pulse rated) are medium base porcelain. Compact Fluorescent sockets feature smart push-pull thermoplastic design for ease of lamping.



DIMENSIONS

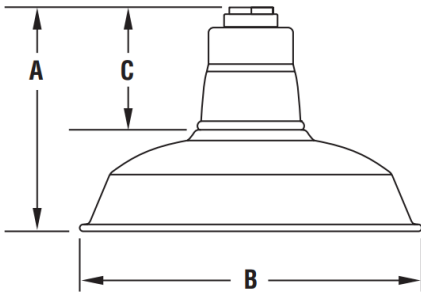

Also available in LED

Diameter	A	B	C	Weight (lb/kg)
100	8 ¼" (210mm)	12" (305mm)	4 ½" (114mm)	2.5 (1.13kg)
150	9 ½" (241mm)	14" (356mm)	4 ½" (114mm)	3.0 (1.36kg)
200	10" (254mm)	16" (406mm)	4 ½" (114mm)	3.5 (1.59kg)
300	11" (279mm)	18" (547mm)	5" (127mm)	4.0 (1.81kg)



Made in the U.S.A. of the U.S. and imported parts.
Meets Buy American requirements for ARRA.

Project Name: _____

Date: _____

Location: _____

Notes: _____

DSA SERIES DECORATIVE

ORDERING INFORMATION SELECT APPROPRIATE CHOICE FROM EACH COLUMN TO FORMULATE ORDER CODE. Refer to example below.

SERIES	DIAMETER	LAMP WATTAGE	LIGHT SOURCE	LINE VOLTAGE	FINISH	MOUNTING	FACTORY INSTALLED OPTIONS	FIELD INSTALLED ACCESSORIES
DSA	100 12" 150 14" 200 16" 300 18"	100 100 Watt Max 150 150 Watt Max 200 200 Watt Max 300 300 Watt Max	INC Incandescent	120	MSV Metallic Silver GWT Gloss White GBK Gloss Black GRD Gloss Red GPT Textured Graphite RUS Textured Rust SVG Satin Verde Green SCP Satin Copper STQ Satin Turquoise	LDS96WL Prewired leads. For use with stem or bracket mounting in wet or indoor locations. CA120WHT ² - 10' prewired white cord set and canopy CA120BLK ² - 10' prewired black cord set and canopy CA120WHTS ² - 10' prewired white cord set and canopy with SWAG option CA120BLKS ² - 10' prewired black cord set and canopy with SWAG option CS120 5WHT ³ - 10' prewired white 5-conductor cord set for use with CFL fixtures CS120 5BLK ³ - 10' prewired black 5-conductor cord set for use with CFL fixtures	G6 ⁴ Globe PG3 ⁴ Globe	Ball Aligners Decorative Aligners Gooseneck & Wall Brackets Poles & Pole Brackets Stems Wire Guards Remote Ballasts
		26/32/42	CFL Compact Fluorescent (Globe option required)	UE				
		50 70 100	MH Metal Halide (PG3 Globe option required)	120 277				
		50 70 100	MP Metal Halide (for use in open optics in indoor applications only)					
		175 ¹	PSMV Pulse Start Metal Halide (PG3 Globe option required)					

ORDER:

WLS-DSA								
---------	--	--	--	--	--	--	--	--

Example: WLS-DSA-100-100-INC-120-MSV-CA120WHT-G6

FOOTNOTES:

- 1 175 watt available only with RD200 or 300.
- 2 For indoor applications only. For incandescent and HID fixtures.
- 3 The 5-Wire cord sets do not include a canopy. Order the SMB 26/32/42/ CFL UE GWT decorative canopy/ballast separately. For indoor applications only.
- 4 For wattage and size restrictions, see Abolite Globes in accessories section.



1919 Windsor Place
Fort Worth, TX 76110
800.622.8711

www.wslighting.com

Project Name: _____

Date: _____

Location: _____

Notes: _____